

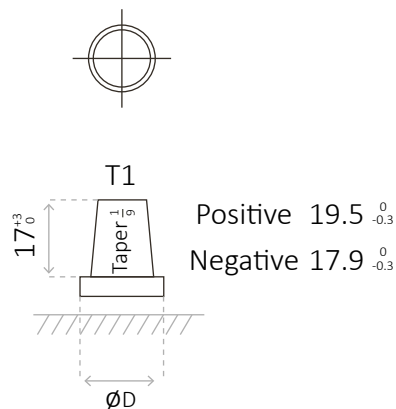


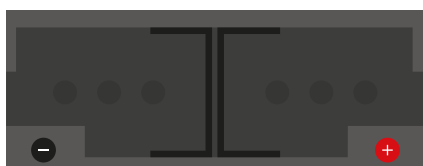

CHARACTERISTICS

- ✓ Ideal for any type of use.
- Ⓐ Great performance due to its Start-Stop characteristics.
- 📏 Compact size ideal for any type of use.

DIMENSIONS

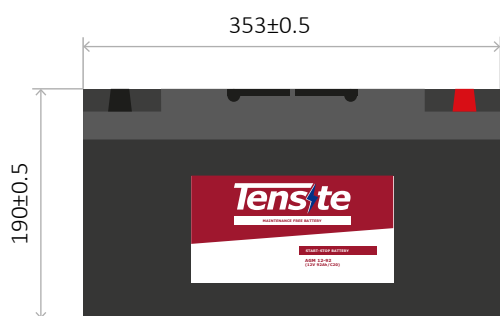

AGM START-STOP BATTERY 12V 92AH

START-STOP SERIES BATTERY

AGM Start-Stop battery is kind of lead-acid battery which adopts advanced AGM (Absorbent Glass Mat) separator technology. It is widely used in mild hybrids vehicles with Start-Stop system.

ADVANTAGES

- **Advanced Grid Production Technology:** The battery has excellent anti-corrosion performance because of new alloy formula and advanced cold rolled grid technology; Also, very little water loss significantly extend the service life of the battery in high temperature environment.
- **AGM Technology:** Oxygen released from positive pole can react with negative lead and gas emissions are controlled by special valve construction, which prevent vehicle components installed near the battery from being corroded; At the same time, due to AGM technology the battery has no free liquid electrolyte, even if the battery is cracked in the sudden accident such as intense turbulence or high speed collision it can still normally start vehicles.
- **High Assembly Pressure Design:** High assembly pressure design can slow the positive paste shedding and prolong its life time greatly.
- **Lead-Carbon Capacitance Technology:** Adopt the lead-carbon capacitance technology, the battery's charge acceptance is significantly improved, therefore, it can more quickly capture the feedback current from vehicle.
- **Long Cycle Life:** The starting life is more than 200000 times, two times longer than ordinary batteries.



COMPLIANT STANDARDS


- EN 50342
- VDA
- GB/T5008.1-2013
- JB/T 12666

TECHNICAL SPECIFICATIONS


BATTERY MODEL	Nominal Voltage	12V		
	Capacity (20 hour rate)	100Ah @20hr to 10.5V @ 25°C (77°F)		
	Reserve Capacity	25A, 10.5V ≥160min		
DIMENSION	Length	Width	Total Height	
	353 mm	175 mm	190 mm	
APPROX. WEIGHT	26.0 kg (57.20 lbs)			
NORMAL CA	1050A			
CCA (-18°C)	880 A to 6.0 V @ -18°C (EN)			
SELF DISCHARGE @25°C (77°F)	<8% after 90 days storage			
OPERATING TEMPERATURE RANGE	-30°C ~ 70°C (-22°F ~ 158°F)			
ACCEPTABLE CHARGING CURRENT	0 ~ 22 A			
CHARGING VOLTAGE @25°C (77°F)	14.5 ~ 15.0 V/cell			
CONSTRUCTION	Case materials	Terminal		
	High temperatura resistant materials	Tapered terminal (Left: negative / Right: positive)		

PERFORMANCE CURVES


Idling-Stop Life at 25°C

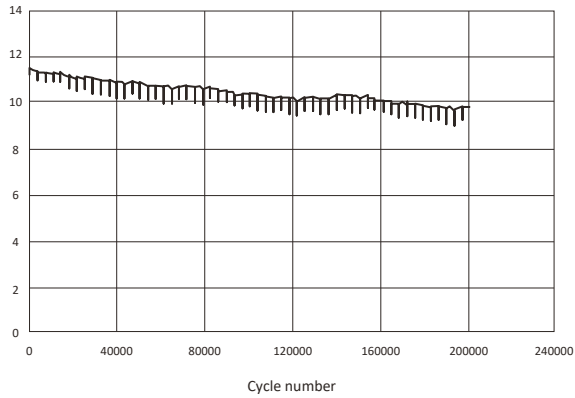

Cycle life at 25°C and 17.5% Depth of Discharge

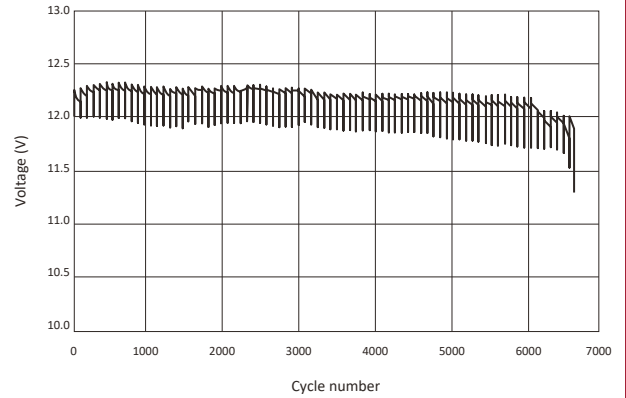

Curve of Self-discharge at Different Temperature

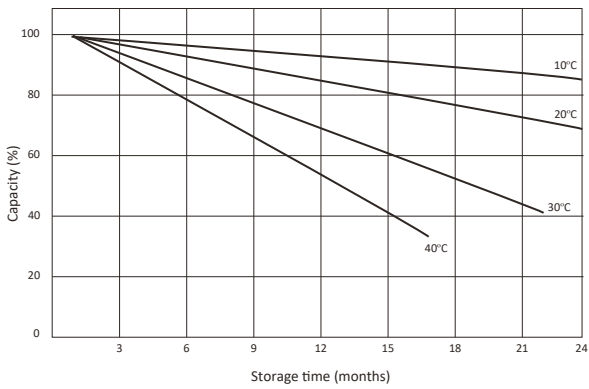

Quick Charge Performance Curve

