


DS-2CD2D14WD

1.0MP WDR Pinhole Network Camera


* Product picture and technical specs subject to change without previous notice.
For further information, please contact our local sales representatives.

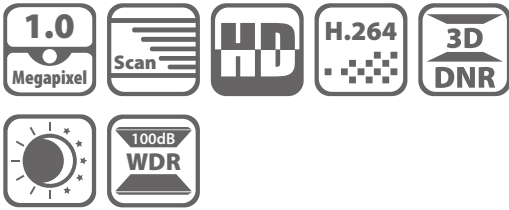

Key features

- Up to 1 megapixel (1280 x 720) resolution
- HD720p real-time video
- 100dB WDR
- 3D DNR

Dimensions

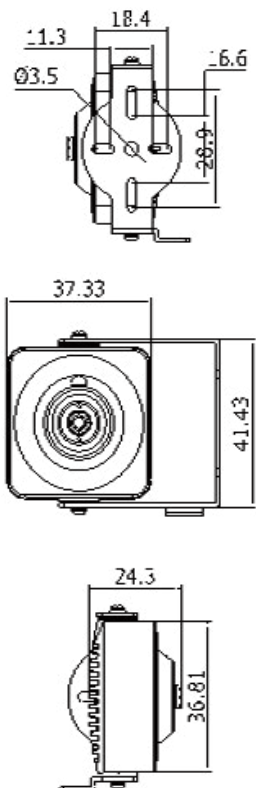

Available model

DS-2CD2D14WD

	DS-2CD2D14WD
Camera	
Image sensor	1/4" progressive scan CMOS
Min. illumination	Color: 0.01 lux@F1.2, AGC on B/W: 0.001 lux@F1.2, AGC on
Shutter time	1/25s (1/30s) ~ 1/100,000s
Lens	3.6mm@F1.2
Day & night	Electronic
Digital noise reduction	3D DNR
Wide dynamic range	100dB
Compression Standard	
Video compression	H.264 / MJPEG
H.264 codec profile	Main profile
Bit rate	32 Kbps ~ 16 Mbps
Image	
Max. Image Resolution	1280 x 720
Frame rate	50Hz: 25fps (1280 x 720) 60Hz: 30fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS
Alarm trigger	Motion detection, dynamic analysis, tampering alarm
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour (SIP optional)
System compatibility	ONVIF, PSIA, CGI, GB28181, ISAPI
General functionalities	Flickerless, dual stream, heartbeat, mirror, user authentication, video mask, watermark
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet port
General	
Operating conditions	-30 °C ~ 60 °C (-22°F ~ 140 °F) humidity 95% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	Max. 3W
Dimensions	35 x 35 x 15 mm
Weight	55g