

MTS-8000 Tester

All your optical network testing needs covered in a single platform



The power of one, performing the work of many

A powerful unit


- Flexible scalable platform
- Industry-leading size and weight
- Interchangeable modules
- Generates test results in seconds
- Fully automatic testing
- Combination of several tests
- Remotely controlled (via Ethernet, Fiber)

A single platform for


- Attenuation testing
- Dispersion testing
- DWDM systems testing
- New fiber testing (attenuation profile)
- PDH/T-Carrier & SDH/SONET testing up to 10G
- Ethernet testing up to 10GigE

Variety of modules to meet all applications

- More than 20 OTDR modules
- Multifunction loss test module
- PMD modules
- CD module
- DWDM analyzers
- High-performance OSAs
- Transport module

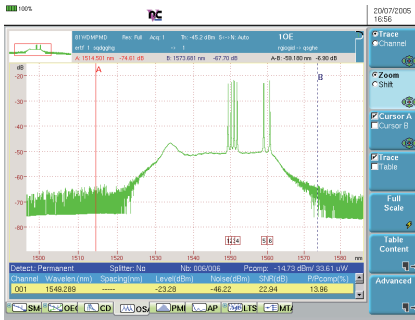

Amplified DWDM system analysis

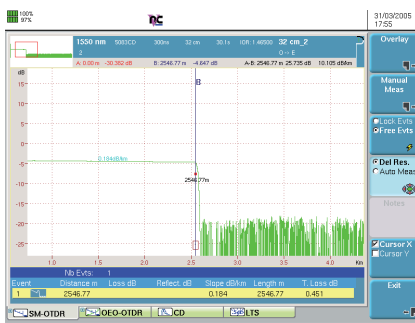

FTTx OTDR testing

Conventional fiber testing

- Ideal for field measurements
- Large variety of OTDR modules
- Length measurement
- Fiber link attenuation
- Reflection
- Splices/connector loss
- Insertion loss
- Optical return loss
- Fast and efficient testing

Fiber characterization testing

- Complete solution
- OTDR
- Chromatic dispersion (CD)
- Polarization mode dispersion (PMD)
- Attenuation profile

CWDM/DWDM testing

- Advanced testing
- Greater functionality
- Higher performance
- 1250 to 1650 nm DWDM measurements
- EDFA & DFB testing
- Channel isolation for BER analysis
- One button testing
- One single port analyzer with channel isolator
- Dual port analyzer with channel isolation
- Transport module

FTTx testing


- During plant installation and maintenance
- Insertion loss
- Event loss
- Event reflectance
- Distance to events
- Power level
- Total ORL or by section

Main Specifications


MTS-8000 BASE	
(typical at 25 °C)	
Display	
TFT color, 10'4 inches, LCD 800 × 600	
TFT color, 10'4 inches, LCD 800 × 600, High visibility	
Touchscreen TFT color, 10'4 inches, LCD 800 × 600, High visibility	
Storage	
Internal memory	16 MB
Hard disk (optional)	min 20 GB
Floppy disk drive (optional)	3.5 inches, MSDOS compatible
CD read/write (optional)	
Input/output interfaces	
RS232C, 2 × USB, VGA, RJ45 Ethernet, RJ11 modem (optional)	

Power supply, battery	
Battery type	standard removable Li-Ion batteries
Operation time	up to 16 OTDR hours with two batteries and standard display, Telcordia GR-196-CORE
Internal charger	yes
Charging time	<3 hours per battery
Trickle charge	yes
DC input	19 to 25 V
Power supply, AC/DC adapter	Input 100 to 240 V, 50 to 60 Hz, 1.8 A, output 19 V DC/3.1 A
Size (w×h×d)	
Mainframe only	320 × 265 × 55 mm/ (with back plate)
Mainframe + receptacle + Battery pack	12.6 × 10.4 × 2.1 inches
	320 × 265 × 116 mm/ 12.6 × 10.4 × 4.5 inches
Weight	
Mainframe only	2.9 kg/6.39 lbs
Mainframe + receptacle + Battery pack	5.4 kg/11.9 lbs

Environmental specifications	
Temperature range	
Operating on mains (no options)	-20 °C to +50 °C (-4 °F to 122 °F)
Operating, all options	0 °C to +40 °C (32 °F to 104 °F)
Storage	-20 °C to +60 °C (-4 °F to 140 °F)
Humidity	95% without condensing
EMI/ESD	CE compliant

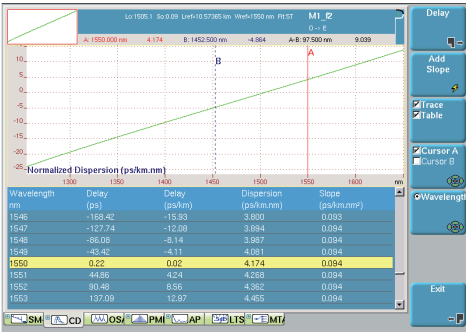

Single menu for chromatic dispersion trace and table display

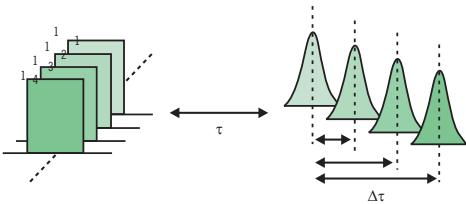

Pulse delay method complies with TIA/EIA FOTP-168

Approved and standardized method

- ITU-T G.650.1
- EIA/TIA FOTP-175-B
- IEC 60793-1-42
- Fast and reliable method
- Single end measurement
- Sectional analysis capability providing CD per fiber section
- 3 functions in 1 : sources, CD, OTDR
- Suitable for all single-mode fibers
- Cost effective method
- Not sensitive to shocks and vibrations (no moving parts)
- Module compatible with the MTS-6000 platform

High performance suitable for any metropolitan network

- Full fiber test performed in only 45 seconds
- Large band coverage (1250 nm to 1650 nm)
- Wide measurement range
- Dynamic range (up to 120 km) dedicated for any metropolitan network configuration

Specifications


Chromatic dispersion module (typical at 25 °C)	
<i>OTDR mode</i>	
Central wavelength	1310/1480/ 1550/1625 nm
Wavelength accuracy ⁽¹⁾	± 5 nm
RMS dynamic range ⁽²⁾	39/38/37/37 dB
Event dead zone ⁽³⁾	6 m max.
Attenuation dead zone ⁽⁴⁾	30 m

<i>Chromatic dispersion mode</i>	
Wavelength range	1255 to 1650 nm
Dynamic range	Up to 120 km
Wavelength absolute accuracy	± 0.1 nm
Dispersion range	0.1 ps/nm*km to 100 ps/nm*km
Zero dispersion wavelength repeatability	± 0.5 nm*
Dispersion coefficient repeatability**	± 0.2 ps/nm*km
Dispersion slope repeatability	± 1%
Measurement time	From 40 s


<i>Optical source mode</i>	
Wavelength range	typical 1310/1480/1550/ 1625 nm ± 5 nm
Spectral width	<10 pm
Power stability in 24 hours	1.5/3/3/3 dBm
Variable output power	-10 dB to calibrated power

(1) DFB lasers
 (2) RMS dynamic range: The one way difference between the extrapolated back scattering level at the start of the fiber and the RMS noise level, after 3 minutes averaging.
 (3) Event dead zone: Measured at ± 1.5 dB down from the peak of an unsaturated reflective event.
 (4) Attenuation dead zone: Measured at ± 0.5 dB from the linear regression using a FC/PC type reflectance.
 * For 25 km G.655 link
 ** For a 75 km G.652 link, at 1550 nm.

Combined WDM, PMD, AP testing module

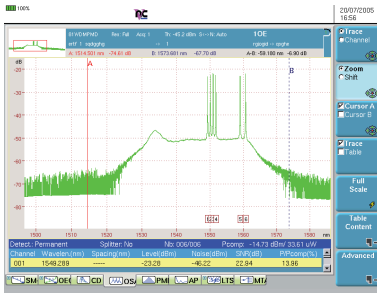

Amplified DWDM system analysis using the E81WDMPMD module

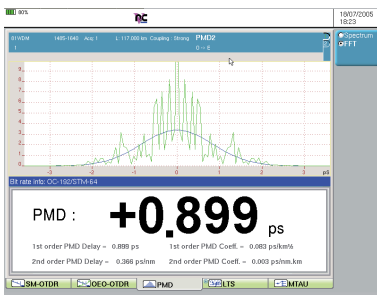

PMD test results showing the first order and second order PMD values



An attenuation profile showing a loss vs. wavelength measurement

A unique solution combining WDM, PMD, and AP (Attenuation Profile) test functions in one plug-in module

- Full-band most compact solution for WDM testing (from 1260 to 1640 nm)
- High-performance PMD module with differential group delay (DGD) measurement in the range of 0.08 ps to 60 ps and high dynamic range of 45 dB
- Attenuation profile provides total loss and dB/km values over a 1260 nm to 1640 nm wavelength range, with a dynamic range of 45 dB
- Shock-proof and vibration-proof instrument with no moving parts (drop tested at 70 cm)
- High-performance module with maximum portability (0.6 kg)
- Module compatible with the MTS-6000 platform

Specifications 81WDMPMD module (typical at 25°C)

General specifications

Weight	0.6 kg (1.1 lb)
Dimensions (w × h × d)	213 × 124 × 32 mm (8.38 × 4.88 × 1.26 in)

Optical interfaces

Applicable fiber	SMF 9/125 μm
Interchangeable optical connectors	FC, SC, DIN, etc.

WDM technical specifications (typical at 25°C)

Wavelength range	1260 nm to 1640 nm
Sweep time (real time)	3 s
Accuracy ⁽¹⁾	±10 pm
Display resolution	1 pm
Minimum spacing between channels	10 GHz
Optical bandwidth (FWHM) ⁽²⁾	30 pm

Power level

Display range	-90 dBm at +30 dBm
Display resolution	0.01 dB
Measurement range on a channel	-79 dBm at +10 dBm
Noise floor ⁽³⁾	-86 dBm
Maximum admissible power (before signal cut off)	
- Total	+20 dBm
- For one channel	+10 dBm
Accuracy ⁽⁴⁾	±0.5 dB max
Linearity ⁽⁵⁾	±0.2 dB
Flatness ⁽⁶⁾	±0.2 dB
Polarization Dependence Loss (PDL)	±0.15 dB
Optical return loss (ORL)	35 dB
Optical rejection ratio (ORR) ⁽⁷⁾	

40 dB at 100 GHz from the carrier
35 dB at 50 GHz from the carrier

- (1) Between 1525 nm and 1620 nm from -40 dBm to +5 dBm
- (2) Between 1525 nm and 1570 nm
- (3) With averaging at 1550 nm
- (4) At -30 dBm and 1550 nm (excluding the uncertainty due to the input connector)
- (5) At 1590 nm from 0 to -40 dBm
- (6) Between 1525 nm and 1620 nm (reference = 1550 nm)
- (7) From the top of a carrier; between 1530 nm and 1605 nm at 0 dBm

PMD technical specifications (typical at 25°C)

Dynamic range	45 dB
DGD measurement range ⁽¹⁾	0.08 ps to 60 ps
DGD absolute uncertainty ^{(2), (3)}	± 0.02 ps ± 2% PMD
DGD repeatability ^{(2), (3)}	± 0.025 ps
Measurement time ⁽⁴⁾	6 seconds, independent of the PMD value

- (1) Up to 150 ps in weak mode coupling
- (2) Weak mode coupling, between the DGD range of 0.1 ps and 60 ps
- (3) NPL standard traceable
- (4) Without averaging

AP technical specifications (typical at 25°C)

Dynamic range	45 dB
Measurement time ⁽¹⁾	6 seconds

- (1) Without averaging

Handheld broadband source (OBS-15)

Optical interfaces

Applicable fiber	SMF 9/125 μm
Interchangeable optical connectors	FC, SC, DIN, etc.

Power supply

Battery operation	NiMH, type AA (rechargeable, exchangeable, 2 pieces)
Operating time	approx. 2.5 h
AC operation by means of SNT-92 AC/DC adapter/charger	
Nominal range of use	100 to 240 V, 50/60 Hz
Operating temperature range	0 °C to +45 °C
Weight (including batteries)	0.55 kg (1.2 lb)
Dimensions (w × h × d)	95 × 49 × 185 mm (0.37 × 0.19 × 0.73 in)


Broadband source module

Wavelength range


BBS1	1485 nm to 1640 nm
BBS2	1260 nm to 1640 nm

Optical interfaces

Applicable fiber	SMF 9/125 μm
Interchangeable optical connectors	FC, SC, DIN, etc.
Weight	0.5 kg (1.1 lb)
Dimensions (w × h × d)	213 × 124 × 32 mm (8.38 × 4.88 × 1.26 in)

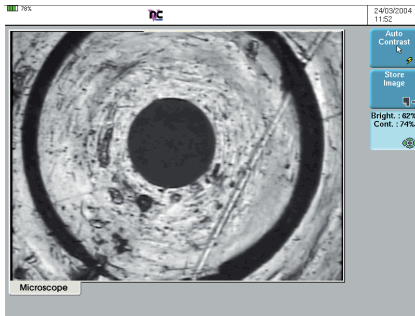

Connector surface inspection

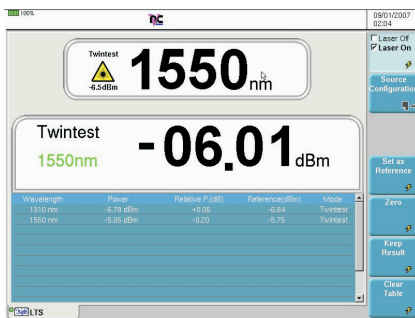

Loss test set results display

Connector Inspection Scope

- Video inspection probe for fiber optic terminations
- For inspection of patchcords and patch panels
- 250 or 400 magnification
- Uses MTS-8000 large screen (10.4")
- Possibility to freeze the image
- Image storage and reload
- Comparison with 3 other images on the same screen
- Compatible with standard connectors including SC, ST, FC and LC

Built-in Optical Talkset

- Suitable for any application
- Cost-effective solution
- Suitable for use in central offices (unlike cell phones)
- Data transfer capability: file exchange or remote control
- Used also for full automatic bi-directional measurements

Insertion Loss Measurements

- Power meter integrated in MTS-8000 mainframe
- Multi-wavelength laser source with CW or modulated signals
- Easy loss measurements of a jumper or patchcord


635 nm Visual Fault Locator

- Universal push/pull for all 2.5 mm connector types


Specifications

Optical video inspection probes	
<i>Physical characteristics</i>	
Operating temperature	0 °C to 50 °C
Storage temperature	-20 °C to 50 °C
Humidity	95% non condensing
Interface	USB
Weight	115.6 g (4.08 oz.)
Dimensions (w × h × l)	45.7 × 43.2 × 140 mm (1.8 × 1.7 × 5.5 in)
<i>Optical characteristics</i>	
Magnification	200× or 400×
Light source	blue LED, internal to probe
Lighting technique	coaxial
Focus control	adjustable, in probe
Max. input power	+30 dBm
<i>Adapter tips</i>	
Termination-specific probe tips available:	
FC, SC, ST, LC and other types for 1.25 mm & 2.5 mm ferrules.	
<i>Storage</i>	
File format	JPEG, BMP


Optical interfaces (optional)	
<i>Power meter</i>	
Power level	+10 to -55 dBm,
Calibrated wavelengths	850, 1310, 1550 nm
Connector type	universal push/pull
<i>Talkset</i>	
Wavelength	1550 nm ± 30 nm
Dynamic range	>45 dB
Function	With data/file transfer,
Laser safety	Class 1 laser,
Connector type	Field interchangeable
<i>VFL</i>	
Wavelength	635 nm ± 15 nm
Output power level	<1 mW
Laser safety	Class 2 laser,
Connector type	Universal push/pull
<i>CW light source</i>	
Wavelengths (selection)	1310/1550/1625 nm
Output power level	-3.5 dBm
Spectral width	<5 nm
Stability in 15 min	± 0.02 dB
Stability in 8 hours	± 0.2 dB
Laser Safety	Class 1 laser
Connector type	Field interchangeable

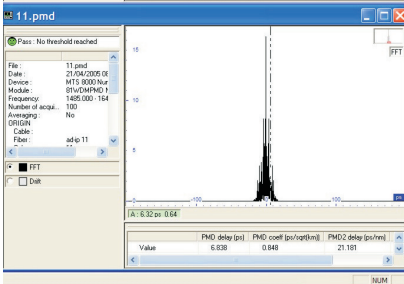

Example of PMD results page

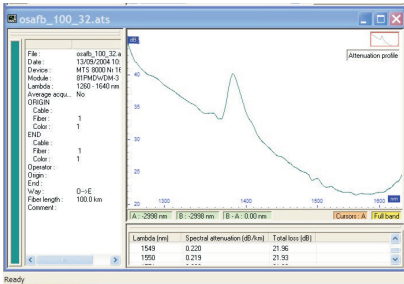

Example of AP results page

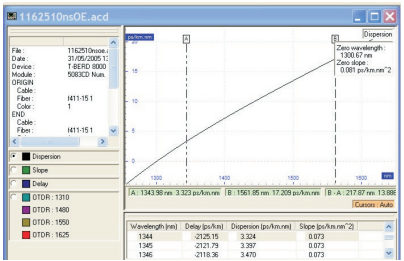

Example of CD results page



Example of OTDR results page

Fiber Cable © ACTERNA 1994-2005 - [Measurement report]

ID	CD	Fiber	Wavelength	Average	1 (D=)	2 (E=)	3 (Average)	2 (D=)	1 (E=)	2 (Average)	3 (D=)	1 (E=)
1	1310	0.023	0.226	-0.041	C	0.107	0.019	0.018	0.015	0.056	-0.003	
2	1310	0.021	0.205	0.030	C	0.107	0.019	0.012	0.013	0.035	0.029	
3	1310	0.027	0.331	-0.032	C	0.150	0.010	0.010	0.010	-0.010	0.035	
4	1310	0.031	0.305	-0.059	C	0.153	0.018	0.012	0.025	-0.020	0.188	
5	1310	0.020	0.194	0.110	C	0.143	0.046	0.050	0.040	0.171	-0.123	
6	1310	0.043	0.376	-0.157	C	0.110	0.047	0.035	0.041	-0.041	0.071	
7	1310	0.031	0.137	-0.010	C	0.063	0.007	0.018	0.012	0.073	-0.038	
8	1310	0.026	0.473	-0.004	C	0.224	-0.010	-0.003	-0.007	-0.001	0.196	
9	1310	0.023	0.238	-0.015	C	0.122	0.013	0.013	0.013	0.044	0.023	
10	1310	0.023	0.468	0.228	C	0.348	0.016	0.021	0.018	0.004	0.025	
11	1310	0.031	0.384	0.121	C	0.252	0.043	0.040	0.041	0.071	-0.031	
12	1310	0.028	0.372	-0.050	C	0.163	0.008	0.009	0.002	-0.001	0.062	
13	1310	0.028	0.317	0.032	C	0.175	0.005	0.079	0.002	-0.004	0.071	
14	1310	0.023	0.372	0.101	C	0.237	0.009	0.016	0.012	0.035	0.004	
15	1310	0.023	0.330	0.149	C	0.304	-0.009	0.006	-0.001	-0.003	0.047	
16	1310	0.026	0.400	-0.025	C	0.187	0.018	0.016	0.017	-0.010	0.039	

Example of cable report

OFS-100 Fiber Trace Results Analysis

- OTDR, CD, PMD, AP, IL/ORL and OSA results analysis
- Batch processing capability via an automation process
- Pass/Fail function
- Customized printouts
- Ideal for report generation on single fiber

OFS-200 Fiber Cable Acceptance Report Generation

- Direct access keys for easy process and efficiency
- Complete fiber characterization reporting capability including bi-directional OTDR, CD, PMD, AP, IL and ORL results
- Advanced OTDR functions for loop back and mid-point management
- Powerful report preview to avoid errors during processing
- Ideal for report generation on multiple fibers

Specifications

OFS-100 FiberTrace

Compatibility with all files generated by the MTS-5000, MTS-8000 and MTS-6000 platforms, OFI-2000 and ONT platform OSA data. FiberCable includes all FiberTrace functions.

PC requirements

- An IBM Pentium 133 MHz PC or 100% compatible computer (Pentium II 233 MHz or above recommended)
- A hard drive and a CD-ROM drive
- 16 MB or more of memory (64 MB recommended)
- A mouse pointing device
- Microsoft Windows™ version 95, 98, 2000, NT, or XP
- Microsoft Excel™
- Memory requirements for Microsoft Excel™ Report macro: 48 MB or more of memory (128 MB recommended)
- A 800 × 600 pixels monitor (1152 × 864 or above recommended)

Ordering information

MTS-8000

Base instrument options

EM8000bt	MTS-8000 platform with battery pack
E8100	Receptacle for two plug-in modules
E80HVCol	High visibility TFT color display
E80HVTCol	High visibility touchscreen TFT color display
E80Hdisk	Hard disk drive
E80FD	Extractable floppy disk drive
E80CDRW	Extractable R/W CD-ROM drive
E80MDM	Built-in PSTN modem
E80VFL	VFL with UPP connector
E80TS	Optical talk set
E80PM	Optical power meter with UPP connector (2.5 mm provided as standard)
E8036LTSTS	Optical loss test set with talk set 1310/1550/1625 nm

Main accessories

E80keyB	External keyboard
E80Lilon	Additional Li-Lon rechargeable battery
E80Scase1	Wrap around soft carrying case for MTS-8000 and 2 plug-ins receptacle configuration
E80Scase2	Soft carrying case for long configuration
E80Scase3	Soft carrying case for MTS-8000 and 2-slot receptacle, or transport or OSA-160/200 module
E80Hcase	Hard transit case for long configuration
C80Hcase5	Hard carrying case for MTS-8000 and 2-slot receptacle, or transport or OSA-160/200 module

Application software

EOFS100	Optical FiberTrace software (for post-analysis)
EOFS200	Optical FiberCable software (for cable acceptance report generation)

MTS-8000 modules

Multimode OTDR plug-in module

E8123MM	High resolution 850/1300 nm
---------	-----------------------------

Singlemode OTDR plug-in modules

E8126SR	Short range 1310/1550 nm
E8126DR	Medium range high res. 1310/1550 nm
E8126HD	Long range 1310/1550 nm
E8127HD	Long range 1625 nm
E8136HD	Long range 1310/1550/1625 nm
E8126VHD	Very long range 1310/1550 nm
E8127VHD	Very long range 1625 nm
E8129VHD	Very long range 1550/1625 nm
E8126UHD	Ultra long range 1310/1550 nm
E8136UHD	Ultra long range 1310/1550/1625 nm

Chromatic dispersion plug-in module

E5083CD	Medium range 1310/1480/1550/1625 nm OTDR/CD module
E508XLS	1310/1480/1550/1625 nm DFB source option

Polarization mode dispersion plug-in modules

E81PMD	PMD module (1480 to 1640 nm)
E81WDMPMD	PMD module (1260 to 1640 nm) combined with WDM and AP
EOBS15	Stand-alone broadband source
E81BBS1	1480-1640 nm broadband source module
E81BBS2	1260-1640 nm broadband source module

OFI plug-in module

E8126OFI1	1310/1550 nm OFI plug-in module - standard power
E8126OFI2	1310/1550 nm OFI plug-in module - high power
E8136OFI1	1310/1550/1625 nm OFI plug-in module - standard power
E8136OFI2	1310/1550/1625 nm OFI plug-in module - high power
E8132OFI1	1310/1490/1550 nm OFI plug-in module - standard power
E8132OFI2	1310/1490/1550 nm OFI plug-in module - high power

High-performance OSA modules

2281/91.01	OSA-160 Single port analyzer
2281/91.12	OSA-161 Single port analyzer with channel isolator option
2281/91.14	OSA-201 Dual port analyzer with channel isolator option
2281/91.31	OSA-300 High-performance analyzer
2281/91.32	OSA-301 High-performance analyzer with channel isolator option
2281/91.34	OSA-303 High-performance dual port analyzer with channel isolator option
E81WDM	1485-1640 nm WDM plug-in module

Transport module configurations

C83XX	SDH/SONET configuration
C84XX	Ethernet configurations
C85XX	SDH/SONET & Ethernet configurations

Utility modules

Multi-test access unit plug-in module

E81MTAU2	Up to 2 test ports
E81MTAU3	Up to 3 test ports

Launch fiber module

E82LFSM2	2 km singlemode G.652
E82LFSM4	4 km singlemode G.652

15

Ordering information*Thermal printer module*

E82Printer	Thermal printer module
------------	------------------------

Accessories*Optical video inspection probes*

EFSCOPE250	Optical inspection probe, 250× through USB
EFSCOPE400	Optical inspection probe, 400× through USB

*Connectors and adapters***Optical inspection**

ETIPSCAPC	SC/APC tip, bulkhead adapter
ETIPE2000	E2000 tip, bulkhead adapter
ETIPSCPC	SC/PC tip, bulkhead adapter
ETIPU125MM	Patch cord tip for 1.25 mm ferrule
ETIPU25MM	Patch cord tip for 2.5 mm ferrule
ETIPFCAPC	FC/APC tip, bulkhead adapter
ETIPSTPC	ST/PC tip, bulkhead adapter
ETIPLC	LC tip or bulkhead adapter
ETIPFCPC	FC/PC tip, bulkhead adapter
ETIPMPOAPC	MPO/APC tip, bulkhead adapter
ETIPMPO	MPO tip, bulkhead adapter

Optical connectors*Universal singlemode connectors*

EUNIPCFC, EUNIPCSC, EUNIPCST, EUNIPCDIN, EUNIPCLC, EUNIAPCFC, EUNIAPCSC, EUNIAPCST, EUNIAPCDIN, EUNIAPCLC

For more information on test adapters, cables, and fiber optic couplers, please refer to the separate datasheet entitled “JDSU Fiber Optic Test Adapters and Cables”.