

Copyright © 2021 by Big Bike Parts, Inc. No part of this instruction sheet may be reproduced without the written permission of Big Bike Parts, Inc.

PART NO. 41-421

SKID PLATE

11/15/2021

FITMENT: CAN-AM RYKER 2019-NEWER

TOOLS NEEDED: 5/16" WRENCH

4MM ALLEN WRENCH



REMOVABLE THREAD LOCK

PLEASE READ THROUGH AND UNDERSTAND THESE INSTRUCTIONS BEFORE BEGINNING.

ESTIMATED INSTALLATION TIME: 15 TO 30 MIN.

### INSTALLATION:

1. IF YOUR RYKER HAS A SKID PLATE OR COVER OVER THE CLUTCH HOUSING, IT MUST BE REMOVED BEFORE STARTING THIS INSTALL.
2. INSTALL THE SKID PLATE BRACKET WITH TWO OF THE NO.10 HEX HEAD THREAD-FORMING SCREWS ACCORDING TO FIG. 1. (DO NOT USE THREAD LOCK OR OVER TIGHTEN THESE SCREWS OR DAMAGE MAY OCCUR.)
3. WHILE HOLDING THE SKID PLATE IN PLACE, INSTALL THE TWO M6-1.0 X 8MM LONG BUTTON SOCKET HEAD CAP SCREWS INTO THE SKID PLATE BRACKET (INSTALLED IN STEP 2) ACCORDING TO FIG. 2. **USE REMOVABLE THREAD LOCK ON THE TWO M6 SCREWS.**
4. INSTALL THE TWO REMAINING NO.10 HEX HEAD THREAD-FORMING SCREWS ACCORDING TO FIG. 1. (DO NOT USE THREAD LOCK OR OVER TIGHTEN THESE SCREWS OR DAMAGE MAY OCCUR.)

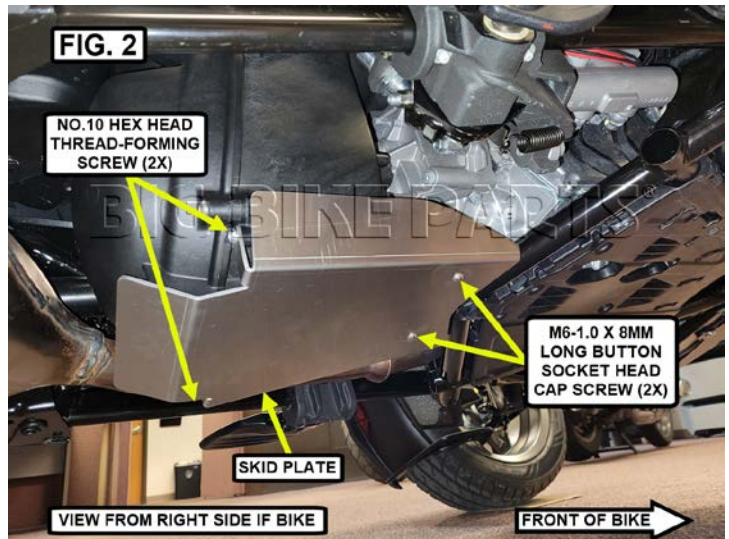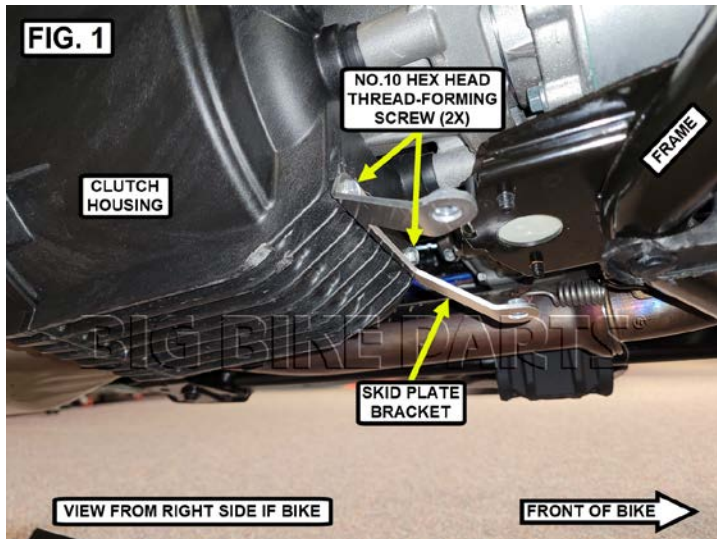

### NOTICE

IGNORING THE CONTENTS OF THESE INSTRUCTIONS MAY AFFECT THE PRODUCT PERFORMANCE AND FUNCTIONALITY. NOT FOLLOWING THESE INSTRUCTION MAY CAUSE DAMAGE TO THE PRODUCT OR THE VEHICLE TO WHICH IT IS BEING ATTACHED.

### WARNING

THREADLOCK CAUSES PLASTICS TO CRACK, BREAK OR BECOME BRITTLE. WHEN USING THREADLOCK TO INSTALL HARDWARE WITH PLASTIC COMPONENTS, ONLY APPLY TO METAL COMPONENTS. IT IS CRITICAL THAT ANY EXCESS THREADLOCKER OR SPILLAGE IS CLEANED COMPLETELY FROM PLASTIC COMPONENTS IMMEDIATELY BEFORE DRYING. A DAMP TOWEL OR RAG IS THE BEST WAY TO ACHIEVE THIS. IF EXCESS THREADLOCKER IS NOT CLEANED UP RIGHT AWAY, IT COULD LEAD TO DAMAGED PRODUCTS AND VOID WARRANTY.